

NEW



Alu. impeller

GN120A Metal


120x120x25mm (4.7"x4.7"x1")

Fan Frame:	Die-cast Aluminum(Black or Silver coating)
Fan Impeller:	Metal
Operation Temp.:	-30~60°C
Operation Voltage Range:	110V(±10%); 220V(±10%)
Dielectric Strength:	5mA Max.at 1500V for 1 min
Safety:	Impedance Protected
Termination:	Lead Wire; Pin
Weight:	370g
Protection Class:	IP44
Insulation:	Class F


Specifications

Model	Bearing	Blades	Voltage	Freq.	Current	Power	Speed	Noise	Max. Air Flow	Pressure	
No.			VAC	Hz	A	W	RPM	dB(A)	m³/h	CFM	mmH ₂ O
GN120A1	Ball	5	100/125	50/60	0.16/0.14	14/13	2200/2400	39/41	100/113	59/67	4.6/4.0
GN120A2	Ball	5	200/240	50/60	0.1/0.08	14/13	2200/2400	39/41	100/113	59/67	4.6/4.0
GN120A3	Ball	5	360/400	50/60	0.06/0.05	14/13	2200/2400	39/41	100/113	59/67	4.6/4.0

Engineering Drawing (mm)

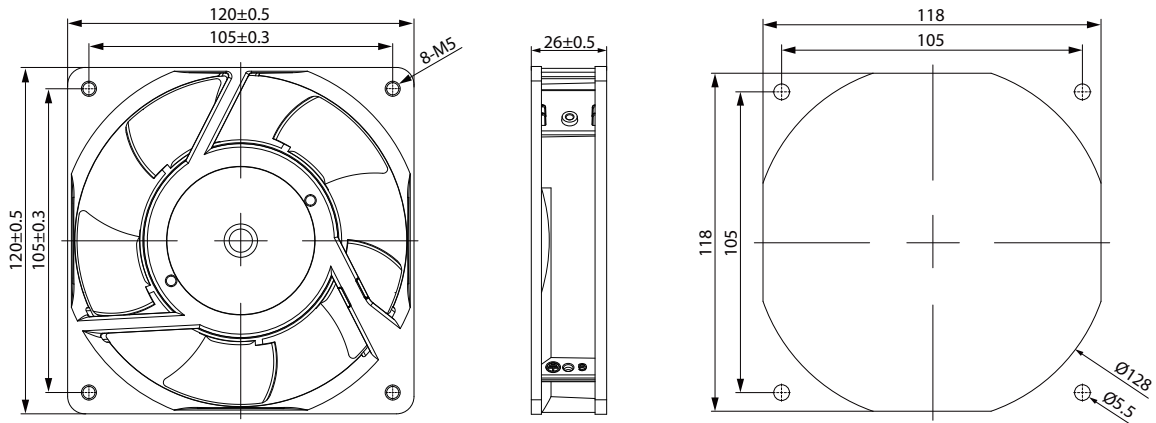

Air Performance

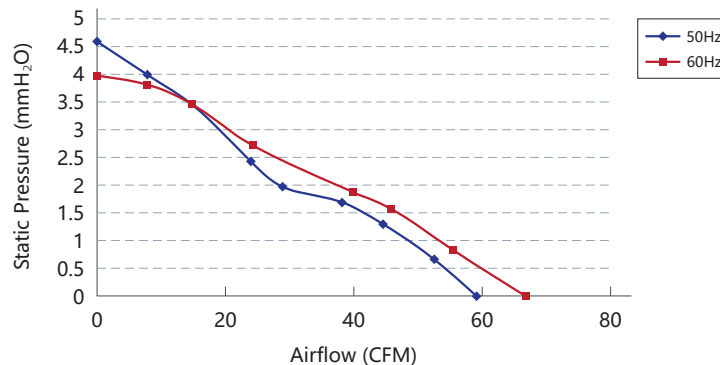

AC Axial Fan - GW Series
AC Axial Fan - GN Series
AC Radial Fan - GRA Series