

GN150D-7

150x150x50mm (5.9"x5.9"x2")




Fan Frame: Die-cast Aluminum(Black or Silver coating)
 Fan Impeller: Plastic
 Operation Temp.: -30~60°C
 Operation Voltage Range: 110V(±10%); 220V(±10%)
 Dielectric Strength: 5mA Max.at 1500V for 1 min
 Safety: Impedance Protected
 Termination: Lead Wire; Pin
 Weight: 810g
 Protection Class: IP44
 Insulation: Class A
 Option: Customized Dual Voltage 110V/220V


Specifications

Model	Bearing	Blades	Voltage	Freq.	Current	Power	Speed	Noise	Max. Air Flow	Pressure	
No.			VAC	Hz	A	W	RPM	dB(A)	m³/h	CFM	mmH ₂ O
GN150D1	Ball	7	100/125	50/60	0.45/0.42	32/30	2500/2600	54/58	297.5/314.5	175/185	7.3/6.2
GN150D2	Ball	7	200/240	50/60	0.24/0.22	32/30	2500/2600	54/58	297.5/314.5	175/185	7.3/6.2
GN150D3	Ball	7	360/400	50/60	0.12/0.11	32/30	2500/2600	54/58	297.5/314.5	175/185	7.3/6.2

Engineering Drawing (mm)

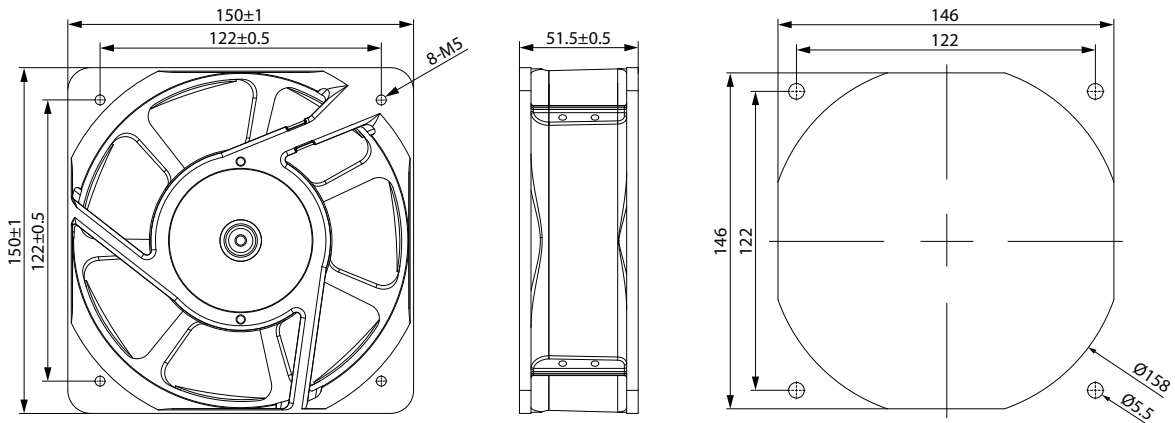

Air Performance

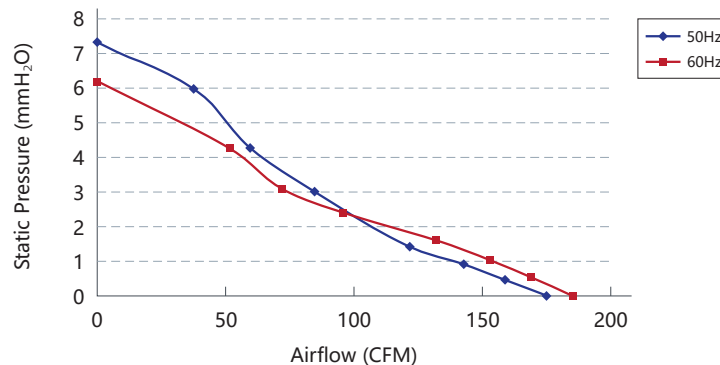

AC Axial Fan - GW Series
AC Axial Fan - GN Series
AC Radial Fan - GRA Series