


## Engineering Drawing (mm)

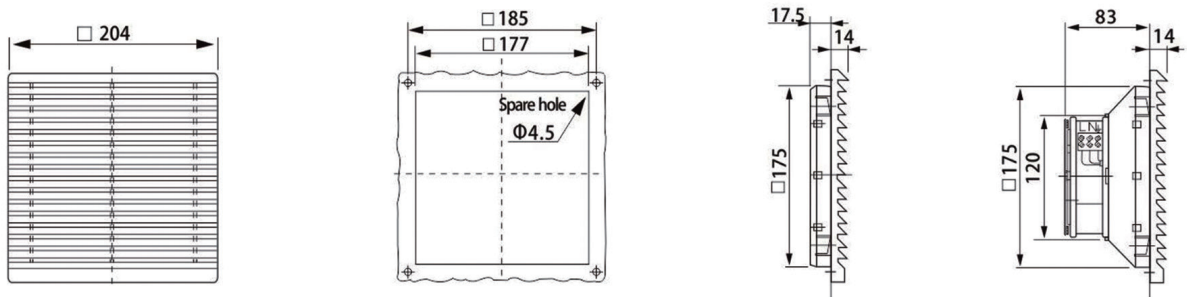

## Specifications

Model No. (Filter fan unit)	GF6623.230	GF6623.115	GF6623.024
Rated operating voltage	220 ~ 240V	110 ~ 120V	24V
Frequency	50/60 Hz	50/60 Hz	/
Air flow rate (Free blow)	105/126 m <sup>3</sup> /h		126 m <sup>3</sup> /h
Air flow rate with filter	1 x GF6623.300:78/90 m <sup>3</sup> /h		
Axial fan	Self starting shaded pole motor		
Max. rated current	0.12/0.11A	0.24/0.22A	0.35A
Rated Power	19/18W		7.7W
Noise level	41/42 dB(A)		41 dB(A)
Operating temperature range	-30°C ~ 70°C		
Model No. (Exit filter)	GF6623.300		
Optional Fan Size	1) 120x120x38mm		
Material	ABS; ABS plastic with UL 94V-0 as customized option		
Air flow direction	Air-in as default; air-out optional		
Protection Level	IP54		